MICROJET HTM

Water jet cleaner

HOT WATER CONNECTION

The device uses water heated by the laboratory boiler

TEMPERATURE REGULATOR

The use of hot water allows a reduction in time and therefore consumption

COLD WATER CONNECTION

Connection for water supply from the water mains

PRESSURE REGULATOR

It allows regulating the pressure from 5 to 30 bars

LAMP

Through low consumption LEDs it illuminates the whole

PRESSURE GAUGE

It shows the operating pressure of the water jet



GLOVES

Sturdy gloves protect the operator while working

WATER DRAIN

With a diameter of 32 mm, it conveys the waste water into the decanter.
It can be placed on the right or left side

SIGHT GLASS

Tempered glass above the work area.
The air jet keeps the glass clean



CONNECTION TO THE PEDAL

It allows connecting the supplied pedal

NOZZLE

With adjustable jet

CONNECTION TO AIR SUPPLY

Quick coupling for Rilsan tube with 8-mm external diameter

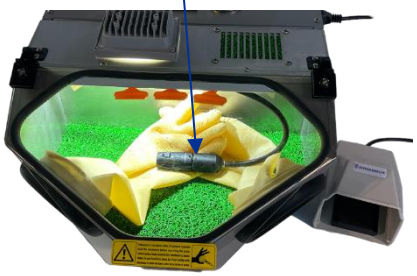

EFFEGI BREGA Srl reserves the right to make changes and improvements without prior notice.

Via Magellano, 7 - 29010 Sarmato (PC) - ITALIA
Tel. +39 0523 887702 - +39 0523 887013 - E-mail: commerciale@effegibrega.it